



AB6317-HT

Bullet Network Camera



3MP · H.265 Compression · Smart Stream II · Bandwidth Saving · WDR Pro · SNV · IP66 · IK10 · P-iris · 30M IR · DIS


VIVOTEK's AB6317-HT is the brand-new professional H.265 high-efficiency outdoor bullet network cameras, offering 30 fps @ 3-Megapixel with outstanding image quality. Employing H.265 technology enables the cameras to provide higher and more efficient image compression rates than previous H.264 systems. In addition, VIVOTEK's sophisticated Smart Stream II Technology enables the cameras to optimize resolution for a desired object or area and therefore to maximize efficiency of bandwidth usage. Combining both H.265 and Smart Stream II, the AB6317-HT can reduce bandwidth and storage consumption up to 80%* while maintaining image quality with the high standard.

As professional day/night cameras, the AB6317-HT is also equipped with WDR Pro and SNV, empowering users to enjoy superb image-detail in any lighting condition. Additionally, IP66-rated housing ensures the ability of these advanced cameras to withstand rain and dust, thus guaranteeing smooth operation even under a multitude of harsh weather conditions. The cameras' IK10-rated housing can also provide protection against acts of vandalism and other impacts.

* Depending on scenes

Key Features

- H.265 Compression Technology
- 1/2.8" Progressive CMOS Sensor
- 30 fps @ 2048x1536
- Smart Stream II to Optimize Bandwidth Efficiency
- WDR Pro for Unparalleled Visibility in High Contrast Environments
- Built-in IR Illuminators, Effective up to 30 Meters
- Remote Focus for Easy Focus Adjustments
- Weather-proof IP66-rated and Vandal-proof IK10-rated Housing
- Extreme Weather Support with PoE
- SNV (Supreme Night Visibility) for Low Light Conditions
- Video Rotation for Corridor View
- P-iris Lens
- DIS (Digital Image Stabilization)

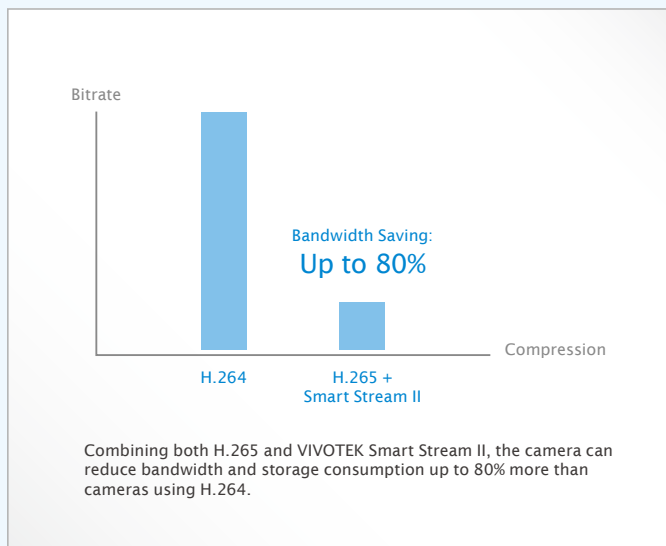

Parking lot



Train station



City surveillance


Technical Specifications

| | |
|-------------------------------|---|
| Model | AB6317-HT |
| System Information | |
| CPU | Multimedia SoC (System-on-Chip) |
| Flash | 128MB |
| RAM | 512MB |
| Camera Features | |
| Image Sensor | 1/2.8" Progressive CMOS |
| Maximum Resolution | 2048x1536 (3MP) |
| Lens Type | Vari-Focal |
| Focal Length | f = 3 ~ 9 mm |
| Aperture | F1.2 ~ F2.3 |
| Auto-iris | P-iris |
| Field of View | 39° ~ 82° (Horizontal) 29° ~ 60° (Vertical) 49° ~ 108° (Diagonal) |
| Shutter Time | 1/5 sec. to 1/16,000 sec. |
| WDR Technology | WDR Pro |
| Day/Night | Removable IR-cut filter for day & night function |
| Minimum Illumination | 0.01 Lux @ F1.2 (Color) 0.001 Lux @ F1.2 (B/W) |
| Pan/Tilt/Zoom Functionalities | ePTZ: 48x digital zoom (4x on IE plug-in, 12x built in) |
| IR Illuminators | 30 meters |
| Video | |
| Compression | H265 & H264 & MJPEG |
| Maximum Frame Rate | H.264 & H.265 30fps @ 2048x1536 MJPEG 15fps @ 2048x1536 |
| Maximum Streams | 3 simultaneous streams |
| S/N Ratio | 60 dB |
| Dynamic Range | 100 dB |
| Video Streaming | Adjustable resolution, quality and bitrate Smart Stream II |
| Image Settings | Time stamp, text overlay, flip & mirror Configurable brightness, contrast, saturation, sharpness, white balance, exposure control, gain, backlight compensation, privacy masks Scheduled profile settings, 3DNR, video rotation, defog, DIS |
| Audio | |
| Audio Capability | Two-Way Audio (full duplex) |
| Compression | G711, G726 |
| Interface | External microphone input Audio output |
| Network | |
| Users | Live viewing for up to 10 clients |
| Protocols | IPv4, IPv6, TCP/IP, HTTP, HTTPS, UPnP, RTSP/RTP/RTCP, IGMP, SMTP, FTP, DHCP, NTP, DNS, DDNS, PPPoE, CoS, QoS, SNMP, 802.1X, UDP, ICMP, ARP, SSL, TLS |
| Interface | 10 Base-T/100 BaseTX Ethernet (RJ-45) *It is highly recommended to use standard CAT5e & CAT6 cables which are compliant with the 3P/ETL standard. |
| ONVIF | Supported, specifications available at www.onvif.org |
| Intelligent Video | |

* Available per project request.

| | |
|-----------------------------|---|
| Video Motion Detection | Five-window video motion detection |
| VCA* | Line crossing detection, field detection, loitering detection |
| Alarm and Event | |
| Alarm Triggers | Video motion detection, manual trigger, digital input, periodical trigger, system boot, recording notification, camera tampering detection, audio detection |
| Alarm Events | Event notification using digital output, HTTP, SMTP, FTP and NAS server File upload via HTTP, SMTP, FTP and NAS server |
| General | |
| Smart Focus System | Remote Focus |
| Connectors | RJ-45 cable connector for Network/PoE connection Audio input Audio output DC 12V power input Digital input*1 Digital output*1 |
| LED Indicator | System power and status indicator |
| Power Input | 12V DC IEEE 802.3af/at PoE Class 0 |
| Power Consumption | Max. 11 W |
| Dimensions | Ø 88 x 293 mm |
| Weight | 1182 g |
| Casing | Weather-proof IP66-rated housing Vandal-proof IK10-rated metal housing (Metal Casing) |
| Safety Certifications | CE, LVD, FCC Class A, VCCI, C-Tick, UL |
| Operating Temperature | Starting Temperature: -10°C ~ 50°C (14°F ~ 122°F) Working Temperature: -20°C ~ 50°C (-4°F ~ 122°F) |
| Humidity | 90% |
| Warranty | 36 months |
| System Requirements | |
| Operating System | Microsoft Windows 8/7/Vista/XP/2000 |
| Web Browser | Mozilla Firefox 7~43 (streaming only) Internet Explorer 7/8/9/10/11 |
| Other Players | VLC: 1.1.11 or above Quicktime: 7 or above |
| Included Accessories | |
| CD | User's manual, quick installation guide, Installation Wizard 2, VAST |
| Others | Quick installation guide, sun shield, wall mount bracket, alignment sticker, desiccant bag, waterproof connector, screw pack |

Dimensions

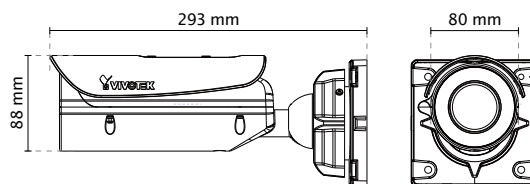

Compatible Accessories

Mounting Kits



AM-312
Pole Mount Adapter



AM-412
Corner Mount Adapter



AM-714
Junction Box

All specifications are subject to change without notice. Copyright © VIVOTEK INC. All rights reserved. P/N: 626011400G

Ver. 2



VIVOTEK INC.
6F, No.192, Lien-Cheng Rd., Chung-Ho,
New Taipei City, 235, Taiwan, R.O.C.
T: +886-2-82455282 F: +886-2-82455322
E: sales@vivotek.com

VIVOTEK USA
2050 Ringwood Avenue,
San Jose, CA 95131
T: 408-773-8686 F: 408-773-8298
E: salesusa@vivotek.com

VIVOTEK Europe
Randstad 22-133, 1316BW Almere,
The Netherlands
T: +31(0)36-5298-434
E: sales@vivotek.com

VIVOTEK India
602, Best sky Tower, Plot No. F-5,
Netaji Subhash Place, Pitam Pura, Delhi-110 034
T: +91-11-45137465
E: salesindia@vivotek.com