




SD8161 Speed Dome
Network Camera

Quick Installation Guide

English | 繁體中文 | 簡體中文 | 日本語 | Français | Español | Deutsch | Português | Italiano | Türkçe | Polski | Русский | Česky | Svenska | Nederlands

Dansk | Indonesia | العربية

1080P HD • 18x Zoom • PoE

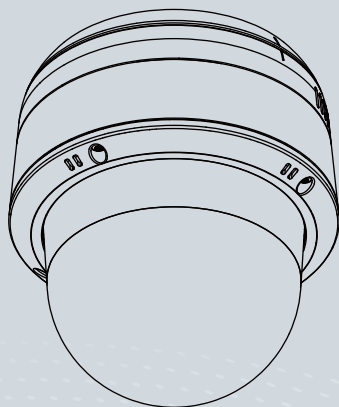

SUPREME




安装警告

- 如果网络摄像头冒烟或有异常气味，请立即关闭。
- 切勿自行拆解网络摄像头。
- 切勿在网络摄像头中插入任何物体，如针状物等。
- 切勿在通电时用手摇晃或旋转网络摄像头。
- 工作温度请参考用户手册。
- 闪电时不要接触网络摄像头。
- 切勿使网络摄像头坠落。


1

Package Contents


● SD8161



● PC/ABS/烟色球形护罩/IO线(单独购买)



● 螺丝钉/校正贴纸/T25星型扳手



● 快速安装指南




● 软件光盘



2


物理描述

● 外观

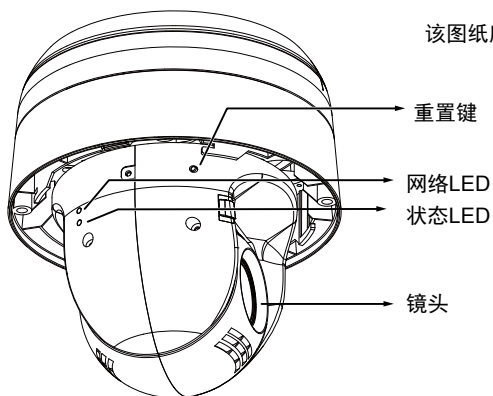

该图纸所示了去除了球形护罩的摄像机

MicroSD 卡插槽可通过使用 T25 螺丝刀卸下球形顶盖来操作。

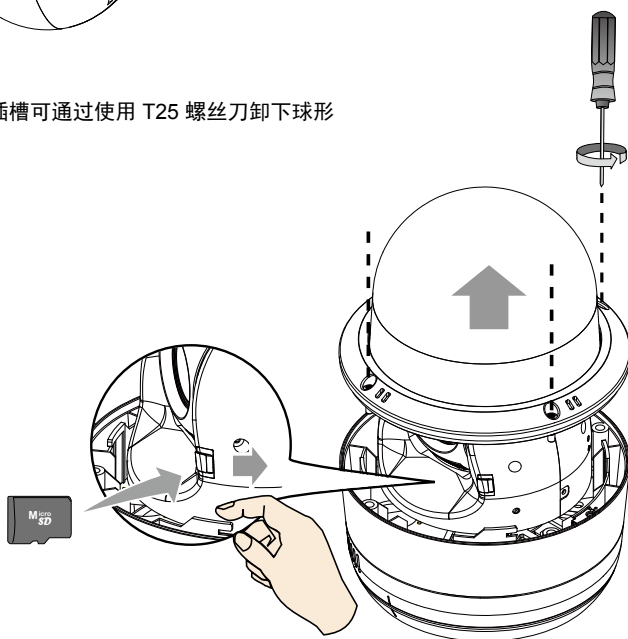


3


硬件安装

摄像机重量为2.2kg。选择一个坚硬的安装点来防止摄像机振动。

1. 转动并分离顶部部分。
2. 将对齐标签贴到墙壁上。在墙壁上钻出 3 个导孔，再钻一个用于布线的小孔。

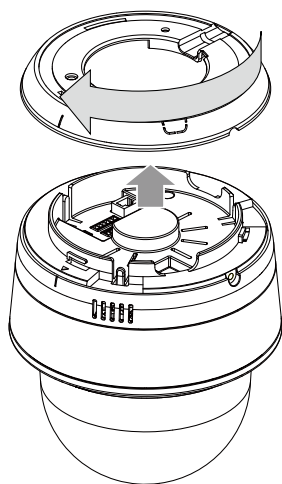

1

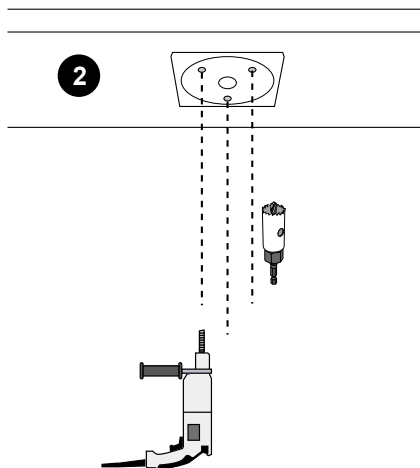


2

 注:


1. IO电缆由用户自备。
2. 避免接触电路板，以防止静电损伤
3. 仅可使用 CAT5e 和 CAT6 线缆。

4. 敲入螺纹锚柱。
5. 利用随附的螺丝，将顶部部分固定到天花板上。
6. 将线缆穿过预先钻好的小孔或侧面开口，然后连接到摄像头上。

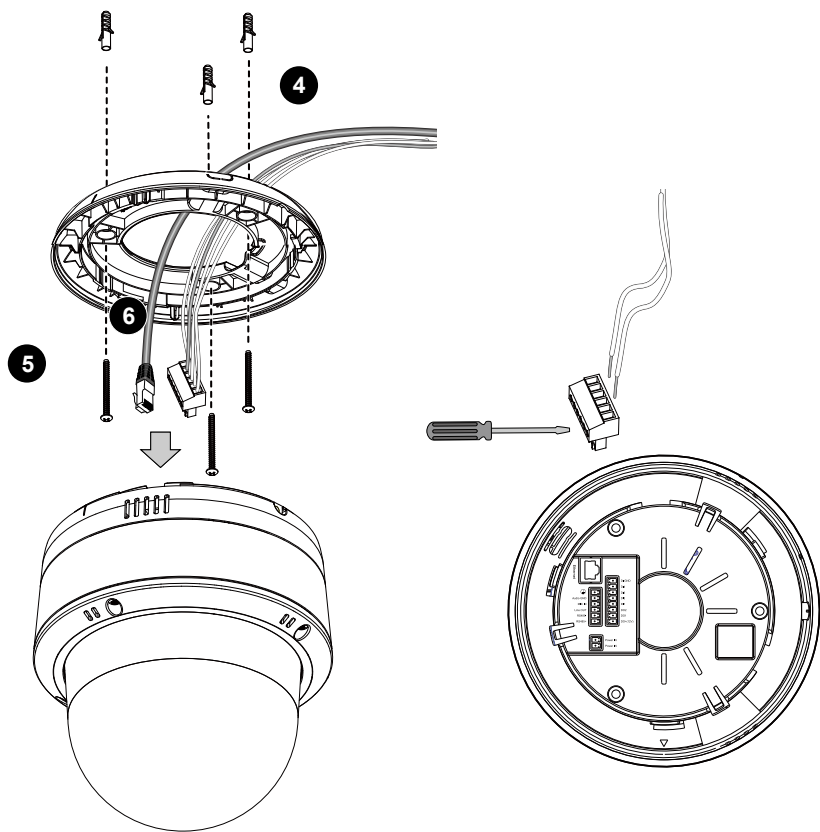


2. 安装网络摄像机

7. 将摄像头机身与顶部部分对齐。使摄像头上的对齐标记与顶部部分上的对准。向上推摄像头，使它与顶部部分吻合。
8. 顺时针转动摄像头。
9. 利用随附的 T25 螺丝刀拧紧侧面的防篡改螺丝，固定两者的衔接。确保所有部件都固定稳妥。

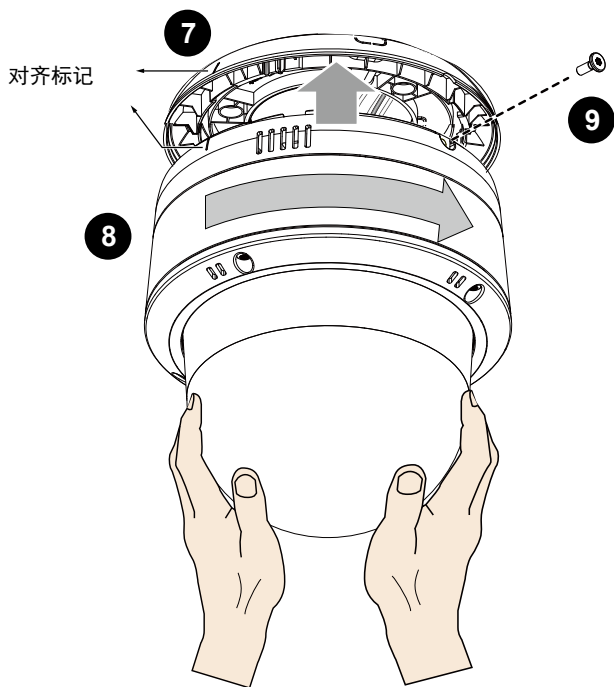

基本连接

1. 将网络摄像头的以太网线 (CAT5e) 连到 PoE Plus 交换机上。

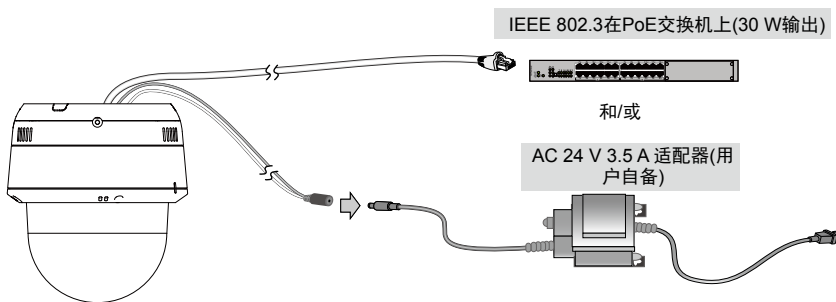


2. 将电源线连接到 AC 24V 电源适配器（用户自备）上。你可以连接两个电源以获得供电冗余度。

以太网供电(大功率PoE)

当使用非PoE交换机时

通过输出功率为 30W 的 PoE Plus PoE 供电单元（单独购买），将网络摄像头与非 PoE 交换机连接。

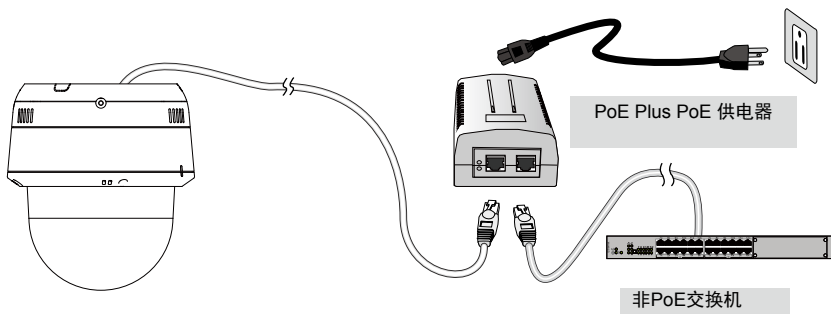

5

分配 IP 地址

1. 运行软件 CD 中 Software Utility（软件实用工具）目录下的“安装向导”。
2. 程序将会对您的网络环境进行分析。分析完网络后，请单击“下一步”按钮以继续运行程序。
3. 程序将搜索同一局域网中的VIVOTEK视频接收器、视频服务器或网络摄像头。
4. 在简易检索后，将弹出主要的安装窗口。双击与摄影机标签上标记的地址相符的MAC地址或包装箱标签上的序列号，以打开带网络摄像机的浏览器会话视窗。

6

准备使用

1. 带网络摄像机的浏览器会话将提示如下内容。
2. 您应能从您的摄影机中观看到现场视频。对于一个部署了多个摄影机的系统，您还应安装软件CD中的32通道录影软件。如需了解其详细的安装信息，敬请参见相关文件。



有关摄像头配置的更多信息，请参阅软件 CD 上的用户指南。

HARDWARE LIMITED WARRANTY

What Is Covered: This warranty covers any hardware defects in materials or workmanship, with the exceptions stated below.

How Long Coverage Lasts: This warranty lasts for THIRTY-SIX MONTHS from the date of purchase by the original end-user customer.

What Is Not Covered: This warranty does not cover cosmetic damage or any other damage or defect caused by abuse, misuse, neglect, use in violation of instructions, repair by an unauthorized third party, or an act of God. Also, if serial numbers have been altered, defaced, or removed. Further, consequential and incidental damages are not recoverable under this warranty.

What VIVOTEK Will Do: VIVOTEK will, in our sole discretion, repair or replace any product that proves to be defective in material or workmanship. Any repair or replaced part of the product will receive a THREE-MONTH warranty extension.

How To Get Service: Contact our authorized distributors in your region. Please check our website (www.vivotek.com) for the information of an authorized distributor near you.

Your Rights: SOME STATES DO NOT ALLOW EXCLUSION OR LIMITATION OF CONSEQUENTIAL OR INCIDENTAL DAMAGES, SO THE ABOVE EXCLUSION OR LIMITATION MAY NOT APPLY TO YOU. THIS WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS, AND YOU MAY ALSO HAVE OTHER RIGHTS WHICH VARY FROM STATE TO STATE.



VIVOTEK INC.

6F, No. 192, Lien-Cheng Rd., Chung-Ho,
Taipei County, Taiwan.
www.vivotek.com

1. Proof of the date of purchase is required. In the event you can not render such document, warranty will commence from the date of manufacture.
2. Cosmetic damage will only be covered by this warranty if such damage has been existed at the time of purchase.

P/N:625028100G Rev.: 1.0

All specifications are subject to change without notice.
Copyright © 2014 VIVOTEK INC. All rights reserved.



VIVOTEK INC.

6F, No.192, Lien-Cheng Rd., Chung-Ho, New Taipei City, 235, Taiwan, R.O.C.
| T: +886-2-82455262 | F: +886-2-82455532 | E: sales@vivotek.com

VIVOTEK Netherlands B.V.

Busplein 36, 1315KV, Almere, The Netherlands
| T: +31 (0)36 5389 149 | F: +31 (0)36 5389 111 | E: saleseurope@vivotek.com

VIVOTEK USA, INC.

2050 Ringwood Avenue, San Jose, CA 95131
| T: 408-773-8686 | F: 408-773-8298 | E: salesusa@vivotek.com