




# AE-237

Outdoor Enclosure with  
Optional Fiber Media Converter


IP66 · IK10 · Easy Installation ·  
Optional Fiber Media Converter Support

VIVOTEK AE-237 is an outdoor enclosure, featuring IP66-rated housing to help the enclosure withstand rain and dust and high pressure water jets from any direction while its IK10-rated housing can provide the protection against the vandal act and impact.


In addition, AE-237 is also compatible with VIVOTEK fiber media converters, AW-IHS-0200 and AW-IHS-0201, for long-range Ethernet connection options.

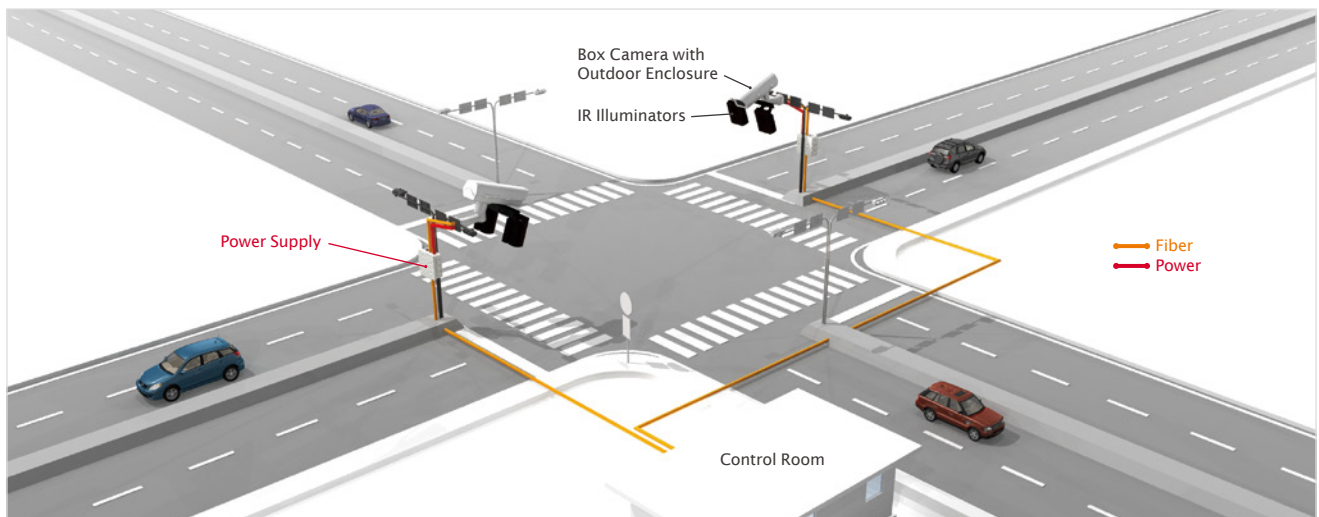

Traffic monitoring

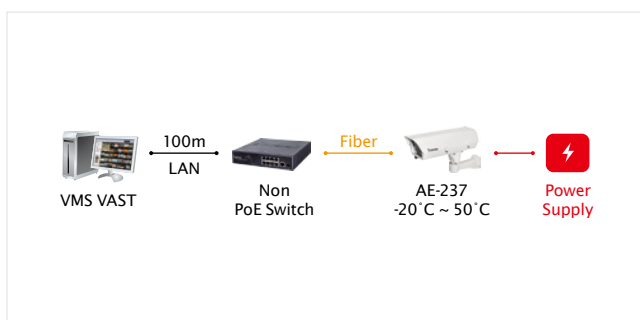

Application Diagram

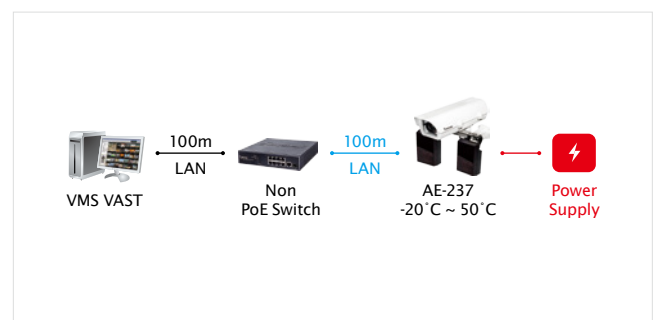


Application Diagram

## Technical Specifications

Viewing Window	Tempered glass
Construction	Die casting Al-alloy
Latch	Dual side locking by screw
Camera Mounting	Removable camera metal sled
Window Heater	15°C On, 25°C Off
Fan On/Off	35°C On, 25°C Off
Power Input	24VAC (Power supply not included)
Coating	White epoxy powder coating
Casing	Weather-proof IP66-rated housing Vandal-proof IK10-rated metal housing

Operating Temperature	-20°C ~ 50°C (-4°F ~ 122°F)
External Dimensions	462.7 (L) x 171 (W) x 256 (H) mm
Weight	Net: 2800g (with bracket)
Included Accessories	Wall bracket, installation guide, screw kit

### Dimensions

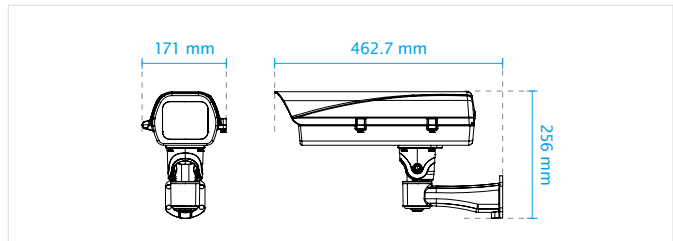

## Compatible Accessories

### Supported Cameras



**IP8155HP**  
1.3MP Box Camera



**IP8165HP**  
2MP Box Camera



**IP8166**  
2MP Box Camera



**IP816A-HP**  
2MP Box Camera



**IP9171-HP**  
3MP H.265 Box Camera



**IP9181-H**  
5MP H.265 Box Camera

### Optional Accessories

#### Media Converters



**AW-IHS-0200**  
Industrial FE Media Converter  
SC MultiMode Fiber 2KM



**AW-IHS-0201**  
Industrial FE Media Converter  
SC SingleMode Fiber 30KM

#### IR Illuminators



**AI-104-010**  
24W IR LED, 10 degree, 100M



**AI-104-025**  
24W IR LED, 25 degree, 50M



**AI-104-035**  
24W IR LED, 35 degree, 25M



**AI-105-010**  
24W IR LED, 10 degree, 200M