




FE8191 Fisheye
Network Camera

Quick Installation Guide

English | 繁體中文 | 簡體中文 | 日本語 | Français | Español | Deutsch | Português | Italiano | Türkçe | Polski | Русский | Česky | Svenska | Dutch
Dansk | Indonesia | العربية

360° Surround View • PoE

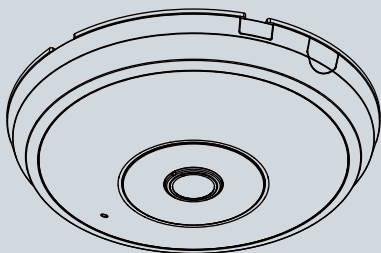

SUPREME




安装警告


- 如果网络摄像头冒烟或有异常气味, 请立即关闭。
- 切勿将网络摄像头放置在不稳定的表面上。
- 切勿在网络摄像头中插入任何物体, 如针状物等。
- 工作温度请参考用户手册。
- 闪电时不要接触网络摄像头。
- 切勿使网络摄像头坠落。

1 检查包装内容


● FE8191



● 螺丝/锚钉/扎线带



● 校正贴纸



● 软件CD




● 快速安装向导




● 电源和输入 / 输出线缆




● 内视图

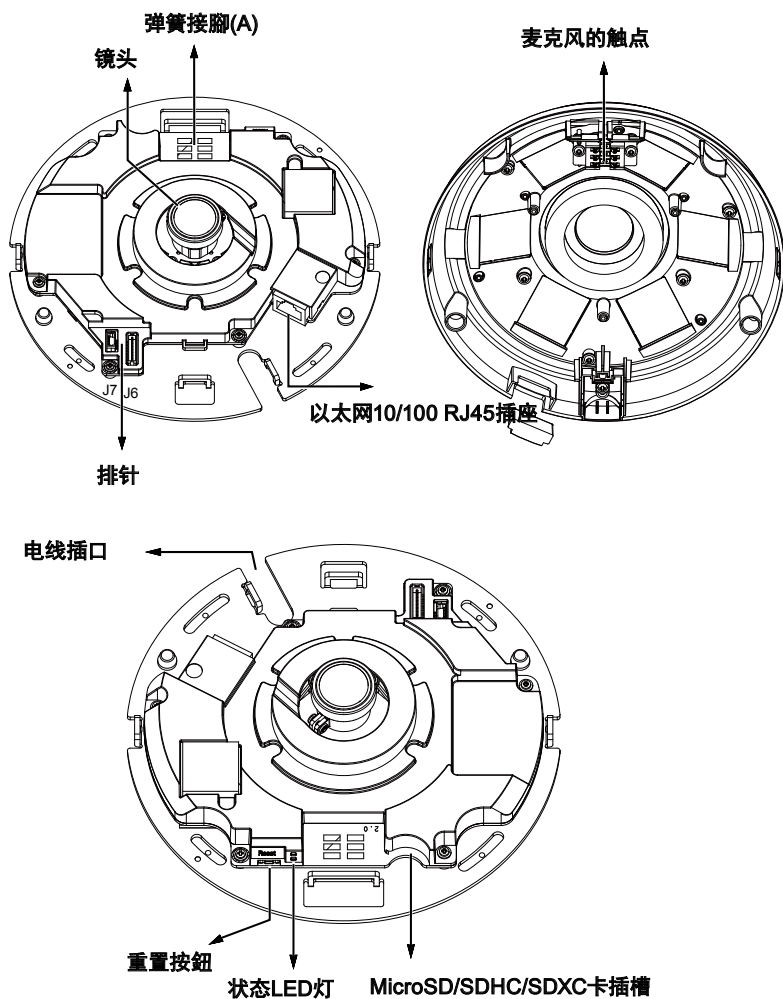

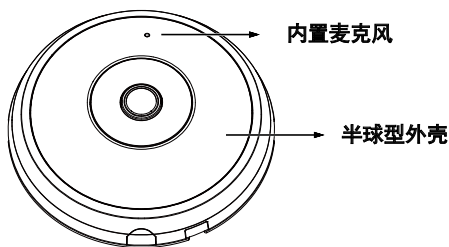

注意:


请在安装摄像头之前先记录下MAC地址。



3

硬件安装

首先，按下释放按钮打开镜头盖。如果镜头盖没有轻松地自行打开，您可以轻压镜头盖的边缘。然后，按照下面的步骤将相机安装在天花板或墙上。

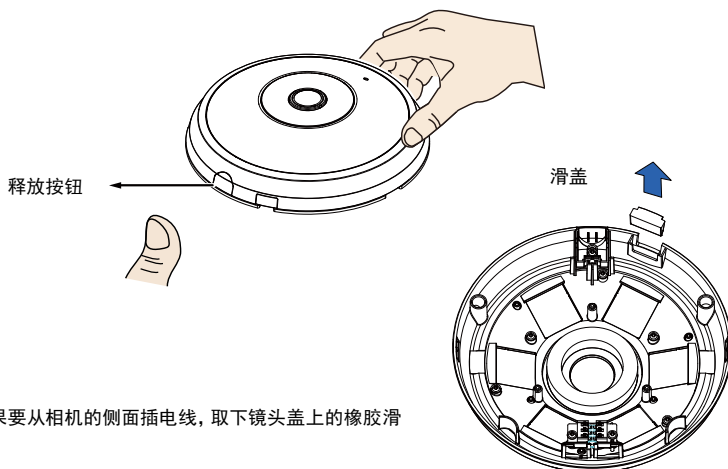

您如果要从相机的侧面插电线，取下镜头盖上的橡胶滑盖。

连接以太网线以及电源和IO线

如果您的交换器不支持PoE, 则请连接供应的电源和输入/输出线缆。将白色接头连接到相机上的J6和J7插口。


电源和输入/输出
线缆

连接电线

您如果要从相机侧面插口插电线, 进行下列操作:



1. 连接以太网以及电源和IO线。以太网线由用户自行准备。
2. 使用随附的扎线带将以太网和 IO 线固定到基板上。将扎线带穿插入分别位于塑料盖一侧和电线开口边缘上的垂直安装固定片。
3. 在电线和垂直安装支架之间保留一定的空隙。请整齐地布线, 以免妨碍上部护盖的安装。
4. 将多余的电线从线卡上剪掉。

您如果要将电线穿过墙或天花板上钻的孔, 只需将电线穿过电线插口即可。

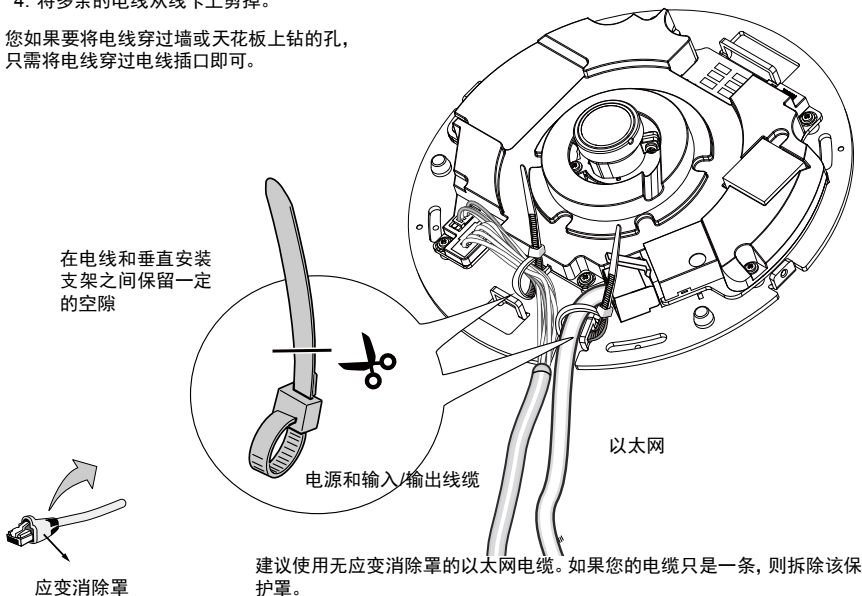

安装于天花板或墙壁

1. 将用于摄影机底座的随附校准贴纸贴在天花板/墙上。
2. 参照贴纸上的圆圈在天花板上钻定位孔，然后用锤子将三个塑料锚钉打入孔中。
3. (可选)在天花板/墙面上钻一个索孔，然后通过该孔馈送线缆。
4. 用所配的螺丝将相机底座固定到天花板/墙上。

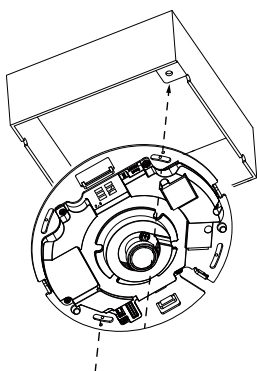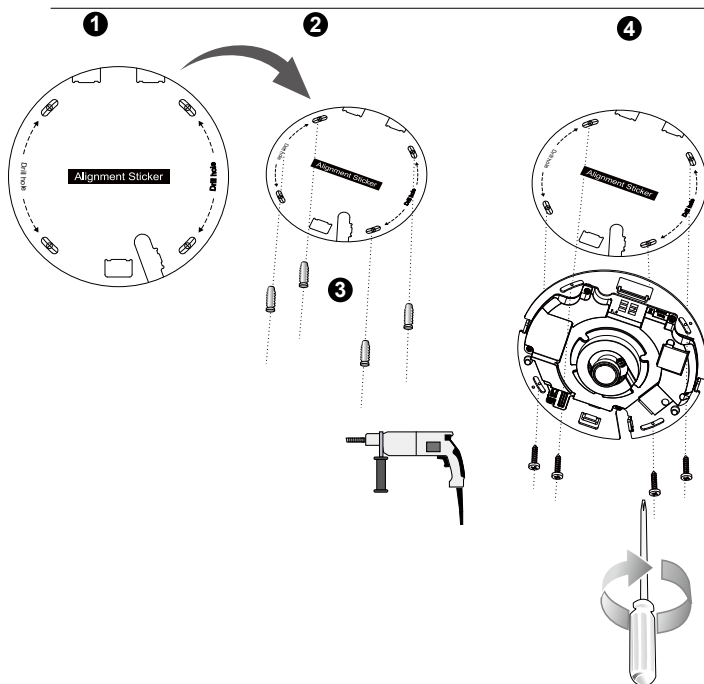



注意:

您还可以将相机安装在美标四路接线盒内。将相机的凹槽对准接线盒上的安装孔，将相机上的对角安装位置对准接线盒上的安装位置。

装上上部护盖


将镜头盖上的卡扣固定支架对准相机底座的孔式支架，将塑料镜头盖慢慢压入相机底座进行安装。

将镜头盖和基板对齐后再按下。用卡口固定装置固定镜头盖。

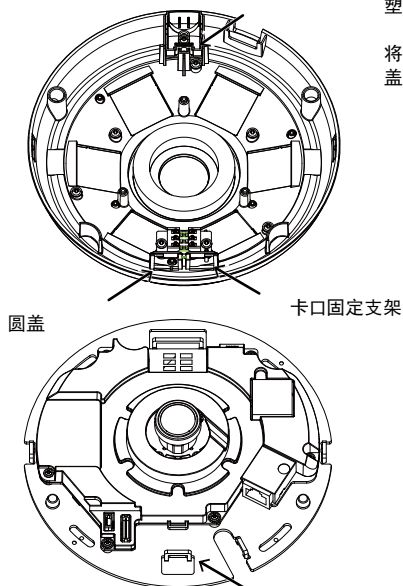

标准连接(不使用PoE)

1. 将RJ45以太网电缆连接至交换机。
2. 将摄像头随附的电源线连接至电源插座。
3. 如果您有传感器和警报器之类的外部设备，请通过标准I/O接线端子进行连接。

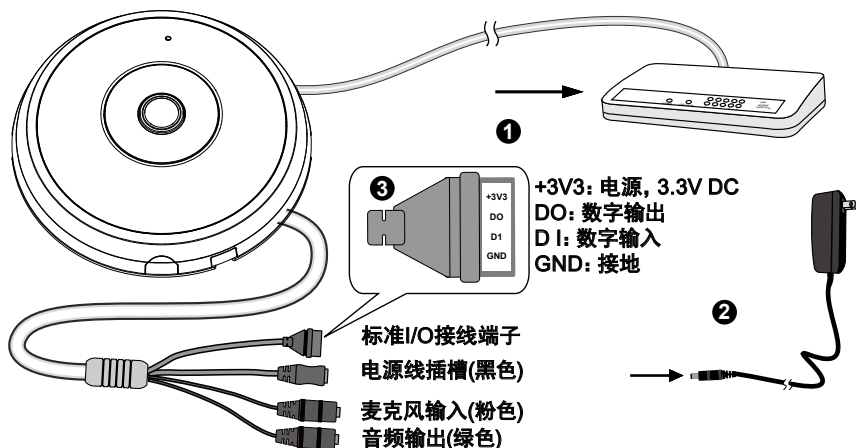

重要事项:

如果首选直流电源, 应符合 IEC 60950-1 的以下规定: 12 伏直流输出电压、2 安培(最小值)、L.P.S.。

以太网供电(PoE)


● 使用支持PoE的交换机时

该摄像头支持PoE，允许电力和数据通过以太网线缆进行传输。参阅下图，通过以太网线缆将摄像头与PoE交换机相连接。




注意：

1. 该设备仅与 PoE 网络相连，由网线供电而无需外部电源线连接。
2. 对于PoE输入，仅使用有PoE输出的UL上所列的I.T.E。

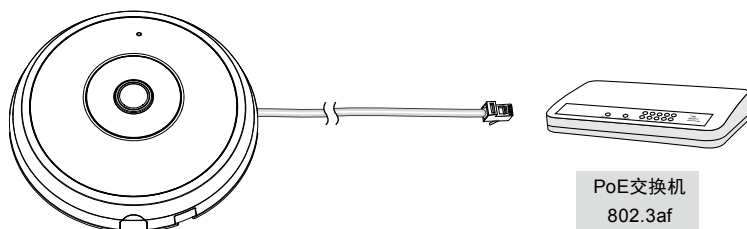

● 使用非PoE交换机时

使用PoE馈电器(可选)连接摄像头和非PoE交换机。

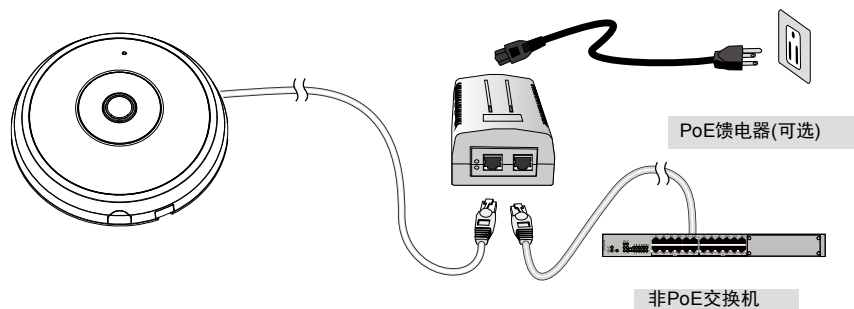

5

分配IP地址

1. 运行软件CD中Software Utility (软件实用工具)目录下的“安装向导”。
2. 程序将会对您的网络环境进行分析。分析完网络后, 请单击“下一步”按钮以继续运行程序。
3. 程序将搜索同一局域网中的VIVOTEK视频接收器、视频服务器或网络摄像头。
4. 在简易检索后, 将弹出主要的安装窗口。双击与摄影机标签上标记的地址相符的MAC地址或包装箱标签上的序列号, 以打开带网络摄像机的浏览器会话视窗。

6

准备使用

1. 带网络摄像机的浏览器会话将提示如下内容。
2. 您应能从您的摄影机中观看到现场视频。对于一个部署了多个摄影机的系统, 您还应安装软件CD中的32通道录影软件。如需了解其详细的安装信息, 敬请参见相关文件。



有关摄像头配置的更多信息, 请参阅软件CD上的用户指南。

注意:

如果您遇到显示实时取景或屏幕上的插件控制相关问题, 您可以手动删除这些有可能安装于您电脑上的插件程序。删除以下文件夹: C:\Program Files (x86)\Camera Stream Controller\。

HARDWARE LIMITED WARRANTY

What Is Covered : This warranty covers any hardware defects in materials or workmanship, with the exceptions stated below.

How Long Coverage Lasts: This warranty lasts for THIRTY-SIX MONTHS from the date of purchase by the original end-user customer.

What Is Not Covered : This warranty does not cover cosmetic damage or any other damage or defect caused by abuse, misuse, neglect, use in violation of instructions, repair by an unauthorized third party, or an act of God. Also, if serial numbers have been altered, defaced, or removed. Further, consequential and incidental damages are not recoverable under this warranty.

What VIVOTEK Will Do: VIVOTEK will, in our sole discretion, repair or replace any product that proves to be defective in material or workmanship. Any repair or replaced part of the product will receive a THREE-MONTH warranty extension.

How To Get Service: Contact our authorized distributors in your region. Please check our website (www.vivotek.com) for the information of an authorized distributor near you.

Your Rights: SOME STATES DO NOT ALLOW EXCLUSION OR LIMITATION OF CONSEQUENTIAL OR INCIDENTAL DAMAGES, SO THE ABOVE EXCLUSION OR LIMITATION MAY NOT APPLY TO YOU. THIS WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS, AND YOU MAY ALSO HAVE OTHER RIGHTS WHICH VARY FROM STATE TO STATE.



VIVOTEK INC.

6F, No. 192, Lien-Cheng Rd., Chung-Ho,
Taipei County, Taiwan.
www.vivotek.com

1. Proof of the date of purchase is required. In the event you can not render such document, warranty will commence from the date of manufacture.
2. Cosmetic damage will only be covered by this warranty if such damage has been existed at the time of purchase.

P/N:625028701G Rev.: 1.1

All specifications are subject to change without notice.

Copyright © 2015 VIVOTEK INC. All rights reserved.



VIVOTEK INC.

6F, No.192, Lien-Cheng Rd., Chung-Ho, New Taipei City, 235, Taiwan, R.O.C.
| T: +886-2-82455282 | F: +886-2-82455532 | E: sales@vivotek.com

VIVOTEK Europe

Randstad 22-133, 1316BW Almere, The Netherlands
T: +31(0)36-5298-434 E: sales@vivotek.com

VIVOTEK USA, INC.

2050 Ringwood Avenue, San Jose, CA 95131
| T: 408-773-8666 | F: 408-773-8298 | E: salesusa@vivotek.com