




PD8136 PTZ Dome
Network Camera

Quick Installation Guide

English | 繁體中文 | 简体中文 | 日本語 | Français | Español | Deutsch | Português | Italiano | Türkçe | Polski | Русский | Český | Svenska | Nederlands

Dansk | Indonesia | العربية

1MP • Pan/Tilt • PoE

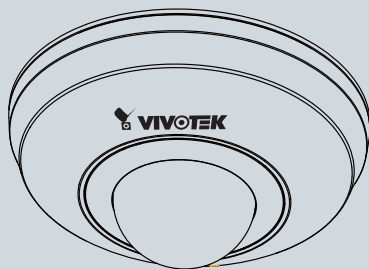




Warning Before Installation

- **Power off the Network Camera** as soon as smoke or unusual odors are detected.
- **Do not place the Network Camera** around heat sources, such as a television or oven.
- **Keep the Network Camera** away from direct sunlight.
- **Do not place the Network Camera** on unsteady surfaces.
- **Do not disassemble the Network Camera.**
- **Do not insert sharp or tiny objects** into the Network Camera.
- **Keep the Network Camera** away from water. If the Network Camera becomes wet, power off immediately.
- **Do not place the Network Camera** in high humidity environments.
- **Do not touch the Network Camera** during a lightning storm.
- **Do not drop the Network Camera.**
- **Do not manually pan and tilt the Network Camera** when the power is on.


● PD8136




● Software CD




● Screws & RJ-45 Coupler



● Ceiling Mount Brackets


● Quick Installation Guide /
Warranty Card

● Alignment Sticker




2 Physical Description

Top View

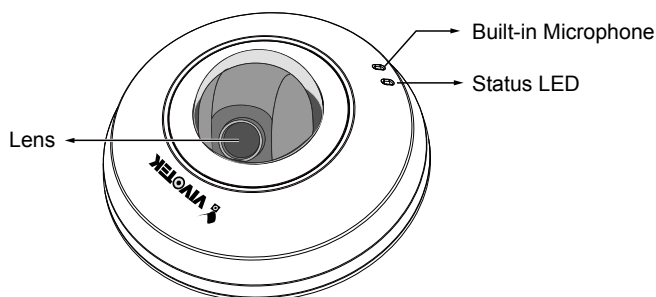


Bottom View

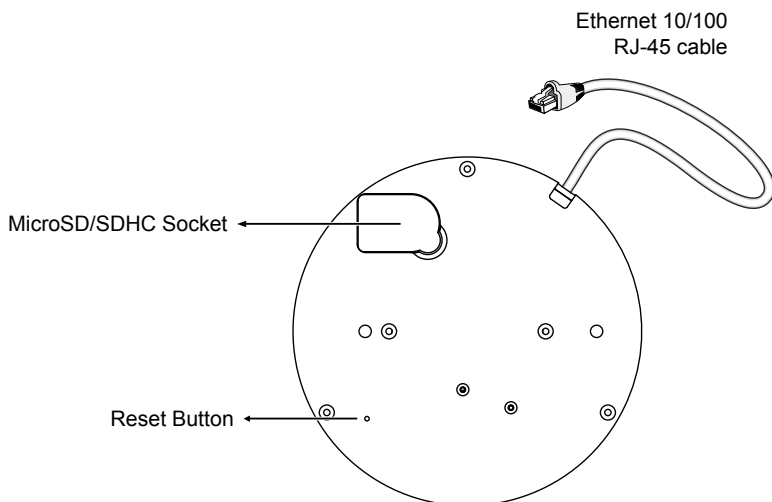




● Mounting Plate and Camera Orientation

When installing the camera, orient the default front on the alignment sticker and the mounting plate (illustrated below) towards the area of your interest. The camera lens' central position is aligned with the VIVOTEK logo on the dome cover.

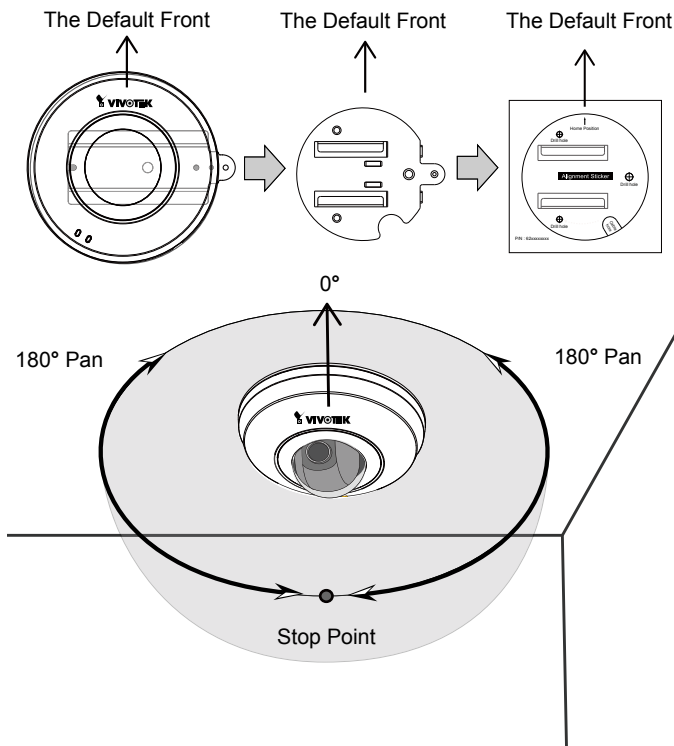


● Install MicroSD Card

Open the MicroSD card plastic cover at the bottom using a small flathead screwdriver. Flip the socket cover forward and up. Insert a MicroSD card, close the cover, and push it back to secure the installation. Install the plastic cover by pressing it back to its original position.

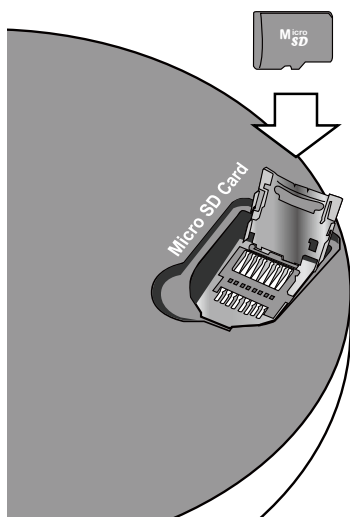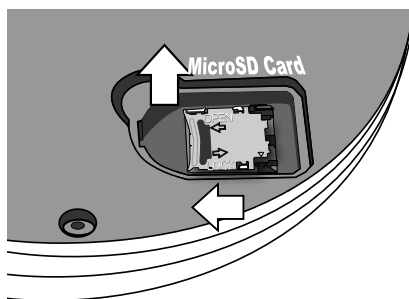

● Mounting the Network Camera

1. Attach base plate "A" of the ceiling mount bracket to the bottom of camera and secure it with two small round head screws. Note that the guiding edge of the base plate (where a screw hole is available) must protrude from the edge of camera.
2. Use the included alignment sticker, orient the sticker toward the direction you prefer.
3. Drill three holes into the ceiling; hammer the plastic anchors into the holes.
4. Install ceiling mounting plate "B" to the ceiling with three screws.
5. Slide the Network Camera into mounting plate "B."
6. Secure the camera to the mounting plate with a small screw.

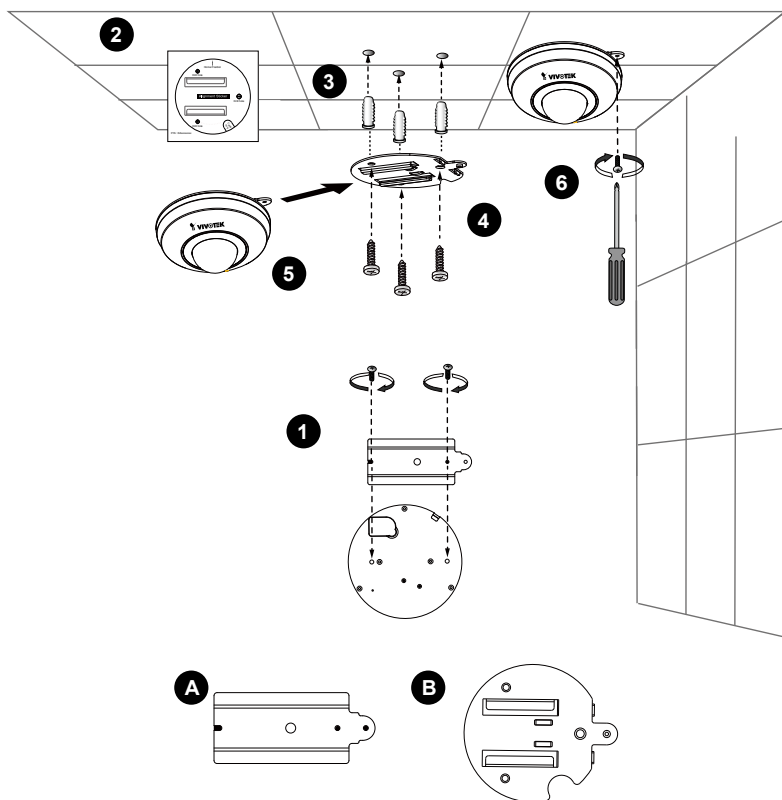


4


Network Deployment

Power over Ethernet (PoE)**● When using a PoE-enabled switch**

This Network Camera is PoE-compliant, allowing transmission of power and data via a single Ethernet cable. Follow the below illustration to connect the camera to a PoE enabled switch via Ethernet cable.

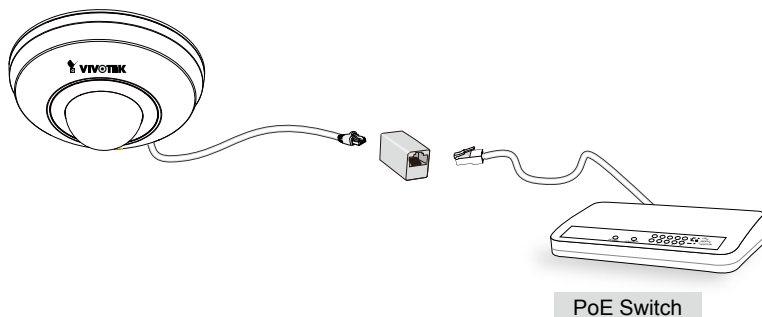**● When using a non-PoE switch**

Use a PoE power injector (optional) to connect between the Network Camera and a non-PoE switch.

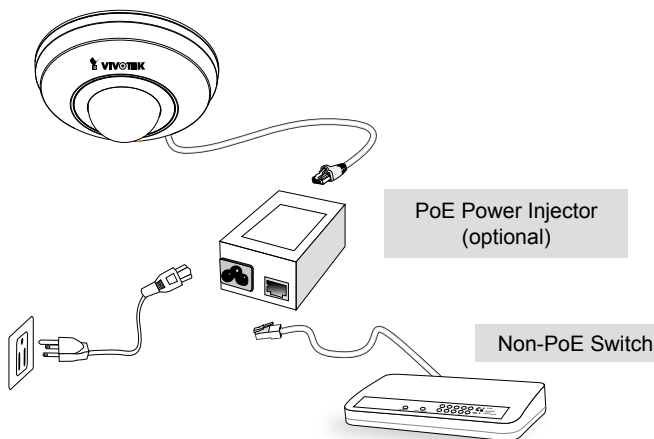

5 Assigning an IP Address

1. Install "Installation Wizard 2" from the Software Utility directory on the software CD.
2. The program will conduct an analysis of your network environment. After your network is analyzed, please click on the "Next" button to continue the program.
3. The program will search for VIVOTEK Video Receivers, Video Servers, and Network Cameras on the same LAN.
4. After a brief search, the main installer window will pop up. Double-click on the MAC address that matches the one printed on the camera label or the S/N number on the package box label to open a browser management session with the Network Camera.

6 Ready to Use

1. A browser session with the Network Camera should prompt as shown below.
2. You should be able to see live video from your camera. You may also install the 32-channel recording software from the software CD in a deployment consisting of multiple cameras. For its installation details, please refer to its related documents.



For further setup, please refer to the user's manual on the software CD.

P/N:625019300G Rev. 1.0

All specifications are subject to change without notice.
Copyright © 2012 VIVOTEK INC. All rights reserved.



VIVOTEK INC.

6F, No.192, Lien-Cheng Rd., Chung-Ho, New Taipei City, 235, Taiwan, R.O.C.
| T: +886-2-82455282 | F: +886-2-82455532 | E: sales@vivotek.com

VIVOTEK USA, INC.

2050 Ringwood Avenue, San Jose, CA 95131
| T: 408-773-8686 | F: 408-773-8298 | E: salesusa@vivotek.com