



# FE9182-H



# FE9382-EHV

## Fisheye Network Camera



H.265 · 5MP · 360° Surround View · WDR Pro · 360° 20M IR · Smart Stream II · IP66 · IK10 · EN50155

VIVOTEK's FE9182-H and FE9382-EHV are two unique H.265 fisheye fixed dome network cameras, both featuring a detailed 5-Megapixel CMOS sensor that produces superb image clarity. By employing H.265 compression technology and VIVOTEK's Smart Stream II technology, these cameras can reduce both bandwidth and storage consumption by up to 80%\* while retaining the highest standard of image quality.


Equipped with a fisheye lens for 180° panoramic view (wall mount) or 360° surround view (ceiling/floor mount) with zero blind spots, the cameras are able to provide coverage of wide, open areas, such as airports, shopping malls, retail stores, offices and more. Further equipped with IR illuminators up to 20 meters, these cameras will maintain surveillance coverage both day and night.

The FE9182-H and the FE9382-EHV are both equipped with a removable IR-cut filter and WDR Pro technology, enabling the cameras to maintain optimal image quality and unparalleled visibility in high contrast lighting environments. Moreover, the FE9382-EHV is designed with full EN50155 compliance, vandal-proof IK10-rated, and weather-proof IP66-rated housing, ensuring that the camera can withstand shock, vibration, humidity, dust, and temperature fluctuations, and maintain stable and reliable video capture during vehicle movement.


\* Depending on scene being monitored.

## Key Features

- H.265 Compression Technology
- 5-Megapixel CMOS Sensor
- 30 fps @ 1920x1920
- 1.47 mm Fisheye Lens for 180° Panoramic View and 360° Surround View
- Removable IR-cut Filter for Day & Night Function
- Built-in IR illuminators, effective up to 20 meters
- WDR Pro for Unparalleled Visibility in High Contrast Environments
- Smart Stream II to Optimize Bandwidth Efficiency
- EN50155 Compliance for Professional Mobile Surveillance (FE9382-EHV)
- Vandal-proof IK10-rated and Weather-proof IP66-rated Housing (FE9382-EHV)
- ePTZ for Data Efficiency
- Built-in 802.3at Compliant PoE
- Support Client Side Dewarping
- Pixel Calculator for Image Clarity Measurement
- Defog

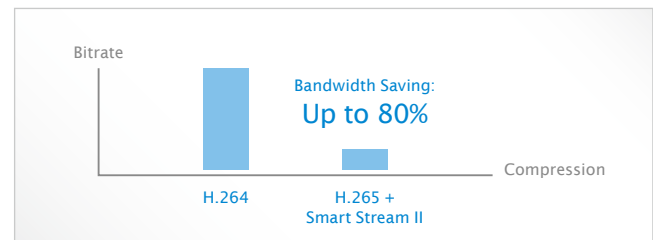

Combining both H.265 and VIVOTEK Smart Stream II, the camera can reduce bandwidth and storage consumption up to 80% more than cameras using H.264.

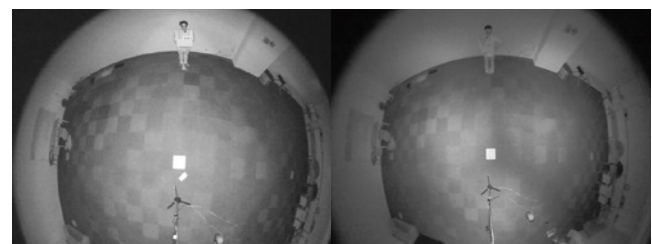

IR with High Uniformity

IR with Low Uniformity

## Technical Specifications

Model	FE9182-H: 360° 20 m IR, WDR Pro FE9382-EHV: 360° 20 m IR, WDR Pro, IP66, IK10, EN50155, Extreme Weather	Compression	G.711, G.726
<b>System Information</b>		Interface	Built-in microphone External microphone input External line output
CPU	Multimedia SoC (System-on-Chip)	Effective Range	5 meters
Flash	128MB	<b>Network</b>	
RAM	512MB	Users	Live viewing for up to 10 clients
<b>Camera Features</b>		Protocols	IPv4, IPv6, TCP/IP, HTTP, HTTPS, UPnP, RTSP/RTP/RTCP, IGMP, SMTP, FTP, DHCP, NTP, DNS, DDNS, PPPoE, CoS, QoS, SNMP, 802.1X, UDP, ICMP, ARP, SSL, TLS, CIFS/SMB
Image Sensor	1/1.8" Progressive CMOS in 3096x2094	Interface	10 Base-T/100 BaseTX Ethernet (RJ-45) *It is highly recommended to use standard CAT5e & CAT6 cables which are compliant with the 3P/ETL standard.
Maximum Resolution	1920x1920	ONVIF	Supported, specification available at <a href="http://www.onvif.org">www.onvif.org</a>
Lens Type	Fixed-focal	<b>Intelligent Video</b>	
Focal Length	f = 1.47 mm	Video Motion Detection	Five-window video motion detection
Aperture	F2.2	<b>Alarm and Event</b>	
Field of View	180° (Horizontal) 180° (Vertical) 180° (Diagonal)	Alarm Triggers	Motion detection, manual trigger, digital input, periodical trigger, system boot, recording notification, camera tampering detection, audio detection, MicroSD card life expectancy
Shutter Time	1/5 sec. to 1/32,000 sec.	Alarm Events	Event notification using digital output, HTTP, SMTP, FTP, NAS server and MicroSD Card File upload via HTTP, SMTP, FTP, NAS server and MicroSD Card
WDR Technology	WDR Pro	<b>General</b>	
Day/Night	Removable IR-cut filter for day & night function	Connectors	RJ-45 cable connector for Network/PoE connection Audio input*1 Audio output*1 DC 12V power input*1 Digital input*1 Digital output*1
Minimum Illumination	0.18 Lux @ F2.2 (Color) 0.001 Lux @ F2.2 (B/W)	LED Indicator	System power and status indicator
Pan/Tilt/Zoom Functionalities	ePTZ: 12x digital zoom (12x on IE plug-in)	Power Input	DC 12V IEEE 802.3at PoE Class 4
IR Illuminators	Built-in IR illuminators, effective up to 20 meters 850nm IR LED*6	Power Consumption	FE9182-H: Max. 12.95 W FE9382-EHV: Max. 20 W
On-board Storage	Slot type: MicroSD/SDHC/SDXC card slot Seamless Recording	Dimensions	FE9182-H: Ø 160 x 39 mm FE9382-EHV: Ø 160 x 51 mm
<b>Video</b>		Weight	FE9182-H: 568 g FE9382-EHV: 762 g
Compression	H.265, H.264, MJPEG	Casing	FE9382-EHV: Weather-proof IP66-rated housing Vandal-proof IK10-rated metal housing
Maximum Frame Rate	H.265/H.264: 30 fps @ 1920x1920 MJPEG: 12 fps @ 1920x1920	Safety Certifications	CE, LVD, FCC Class A, VCCI, C-Tick, UL, EN50155 (FE9382-EHV)
Maximum Streams	4 simultaneous streams	<b>Audio</b>	
S/N Ratio	42.3dB	Audio Capability	Two-way audio
Dynamic Range	100dB		
Video Streaming	Adjustable resolution, quality and bitrate; Smart Stream II		
Image Settings	Time stamp, text overlay, flip & mirror; Configurable brightness, contrast, saturation, sharpness, white balance, exposure control, gain, backlight compensation, privacy masks; Scheduled profile settings, 3D noise reduction; Adjustable image size, quality and bit rate, defog; Pixel calculator		

## Technical Specifications

Operating Temperature	FE9182-H: Starting Temperature: 0°C ~ 50°C (32°F ~ 122°F) Working Temperature: -10°C ~ 50°C (14°F ~ 122°F) FE9382-EHV: Starting Temperature: -25°C ~ 55°C (-13°F ~ 131°F) Working Temperature: -40°C ~ 55°C (-40°F ~ 131°F)	Others	Quick installation guide, warranty card, alignment sticker, desiccant bag, screw driver, screws pack, I/O cable, mounting bracket
Humidity	90%	<b>Dimensions</b>	
Warranty	36 months		
<b>System Requirements</b>			
Operating System	Microsoft Windows 7/8		
Web Browser	Mozilla Firefox 7~43 (Streaming only) Internet Explorer 10/11		
Other Players	VLC: 1.1.11 or above Quicktime: 7 or above		
<b>Included Accessories</b>			

## Compatible Accessories

### Mounting Kits



**AM-114**  
Pendant head  
for outdoor model  
(FE9382-EHV)



**AM-118**  
Pendant head  
for indoor model  
(FE9182-H)



**AM-116/AM-117**  
Pendant pipe  
(20cm/40cm)



**AM-51C**  
Adapting plate  
for indoor model  
(FE9182-H)



**AM-520**  
Mounting adapter