

### INTRODUCTION

The AW-GET-264A is a 26 port 10/100/1000BaseT managed switch capable of feeding 15.4/30W (52V max. per port) power to Power over Ethernet (PoE) devices. It provides a reliable infrastructure for your business network and deliver intelligent features. Moreover, this switch also comes with the functionality specifically designed for managing VIVOTEK's IP cameras and for a quick access to connected devices.

### PACKAGE CONTENTS


* 1x PoE switch	* 1x Quick Installation Guide
* 2x rack mount ears	* 1x power cord (type by the shipped-to area)
* 1x CD-ROM	

### ⚠ IMPORTANT:


1. Install the PoE switch in a ventilated and dry place that is free of electromagnetic source, vibration, moisture, and dust.
2. Make sure the ventilation openings on the switch are not blocked.
3. Use CAT5 or 5e UTP/STP cables.
4. AC input (100~240V/AC, 50~60Hz), for a max. consumption of 185W or 370W.

### CONNECTION


#### Front Panel

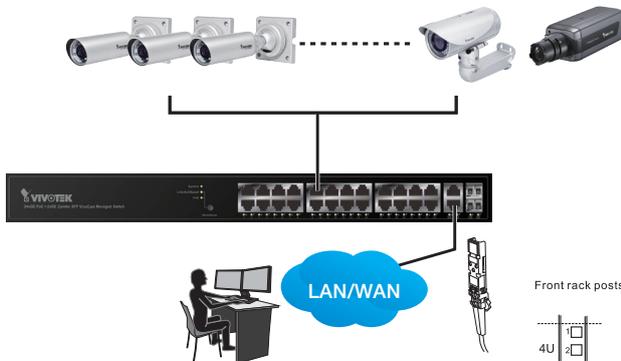

#### Rear Panel

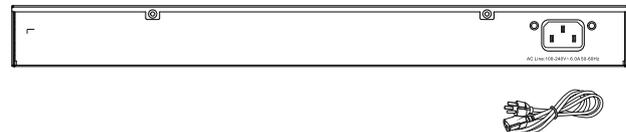

Front rack posts

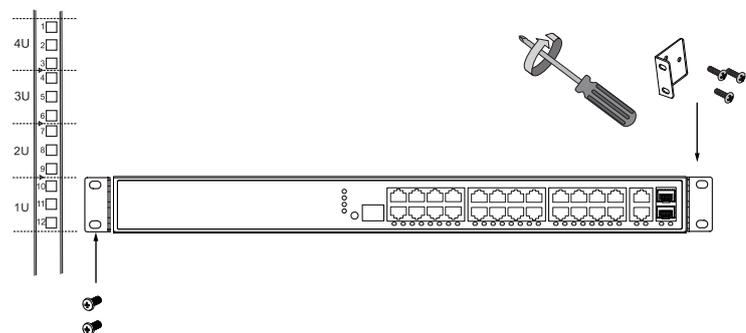

### DEFAULTS

<b>IP Address</b>	192.168.1.1
<b>Subnet Mask</b>	255.255.255.0
<b>Default Gateway</b>	N/A
<b>User name</b>	admin
<b>Password</b>	admin

### LED DEFINITIONS

<b>System</b>	Green ON	Lit when power is on and normal. Off when power is disconnected.	
<b>Link/ACT/Speed</b>	Green	Lit Green when displaying Link/ACT/Speed status of Ethernet ports (selected by the Mode button)	
<b>PoE</b>	Green	Lit Green when displaying the PoE link status with powered devices.	
Below are the LEDs below the Ethernet and SFP ports:			
<b>Ethernet port LED</b>	TP Speed	Green / Yellow	Green when TP link is on 1000Mbps Yellow when TP link is on 10/100Mbps
	PoE (Link/ACT)	Green	Green when PoE linked with powered device and supplying power to them.
<b>SFP speed</b>	Green/Yellow	Green when SFP link is on 1Gbps Yellow when SFP link is on 100Mbps	

All specifications are subject to change without notice.  
Copyright © 2014 VIVOTEK INC. All rights reserved.