

Vandal-Proof Network Speed Dome Camera SD6112V/SD6122V

Quick Installation Guide

This guide describes the basic functions of SD6112V/SD6122V. All detailed information is described in the user's manual.

6F., No. 192, Lien-Cheng Rd., Chung-Ho, Taipei County, Taiwan Tel: +886-2-8245-5282 Fax: +886-2-8245-5532

E-mail: sales@vivotek.com http://www.vivotek.com

1 Check Package Contents

SD6112V / SD6122V



OFixing Plate / Self-tapping Screws / Plastic Screw Anchors







Alarm Cable



Software CD



Warranty Card



Hard Ceiling Mount and Decoration Ring



50-cm Data Cable for Power Supply, Video and RS-485




DC Power Adaptor & Power Cord



Quick Installation Guide




2 Physical Description

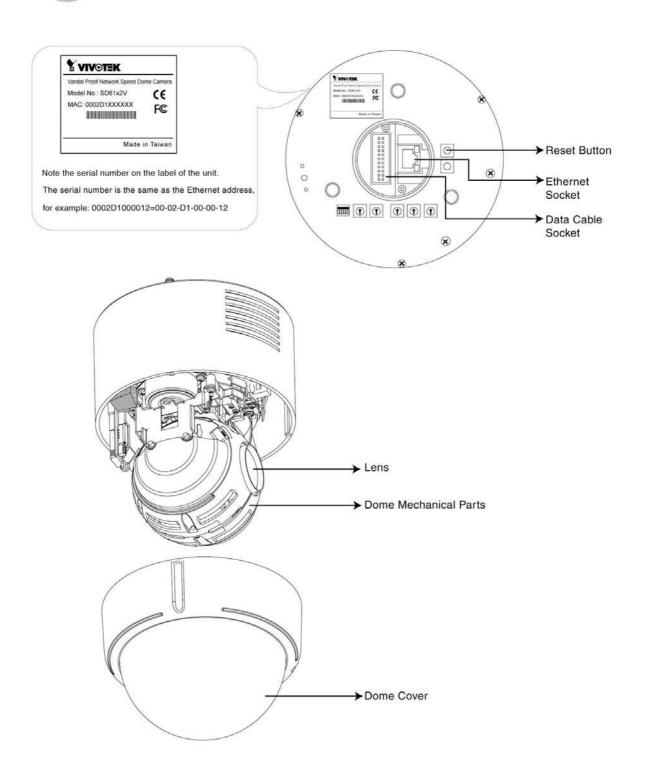


3 Installation


1. Screw the Fixing Plate to your dome body.




2.Remove the Hard Ceiling Mount from the Decoration Cover.




- 3.Attach the Mount to the ceiling.Mark the locations where all three ceiling holes should go.
- 4.Drill these holes on the hard ceiling.




5. Fix the Mount with three screws.




6.Connect the data cable and Ethernet through the center hole of the Mount to the dome body.




7.Make connections

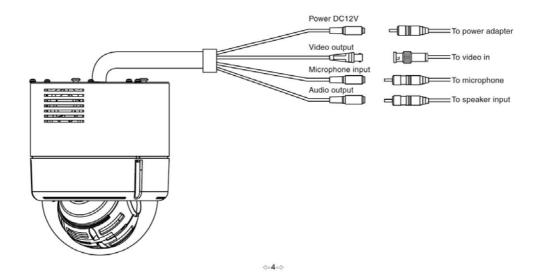


8. Attach the dome body to the Mount and rotate the dome body clockwise. Tighten the fixing screw on the fixing plate.






9. Assemble the Decoration Cover to the Mount.



10.Completion





- 1.Run the "Installation Wizard" under "Utility" directory on the software CD.
- 2.The program will search Vivotek Video Servers or Network Cameras on the same LAN.




address.

Network Camera / Video Server Installation Wizard Serial Number Assigned Model IP Address Auto IP 00-02-D1-00-00-19 3.After searching, the main 192.168.0.219 Yes SD61x2V Yes installer window will pop 00-02-D1-00-08-7E 192.168.0.70 IP31x2 Upgrade 192.168.0.213 Yes IP3132 Yes up. Click on the serial 00-02-D1-24-00-08 192.168.0.207 192.168.0.226 IP3132 Reset to default IP3132 number that matches your 00-02-D1-00-11-1B 192.168.0.102 Network Camera's serial number. 4.Click "Link to selecteddevice(s)" to connect the Internet Explorer to the Exit Network Camera. About Remove Uncheck All Link to selected device(5) * If there is no DHCP server on the LAN, please refer to the user's manual for the methods of assigning an IP



The Internet Explorer Connects to the Network Camera

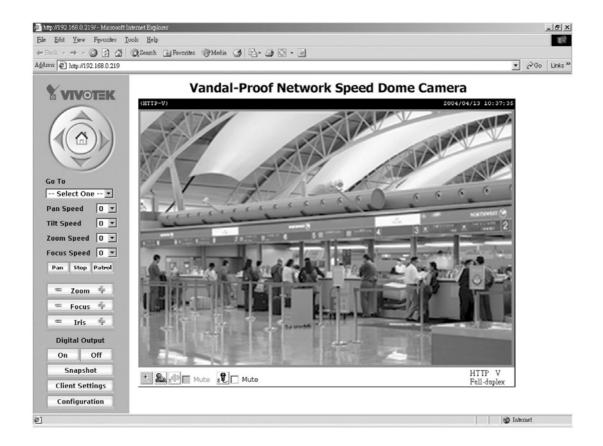

For further setup, please check the user's manual on the software CD.