

Network Video Receiver Quick Installation Guide

English | 繁體中文 | 簡體中文 | 日本語 | Français | Español | Deutsch | Português | Italiano



RX7101

This guide describes the basic functions of RX7101.
All detailed information is described in the user's manual.



Warning Before Install

- **Power off the Video Receiver as soon as it is found smoking or smelt unusual.**



Contact your distributor when such cases happen.

- **Keep the Video Receiver away from the water. If the Network Camera is wet, power off immediately.**




Contact your distributor when such cases happen.

- **Do not place the Video Receiver around the heat sources, such as television or oven.**



- **Refer to your user's manual for the operating temperature.**

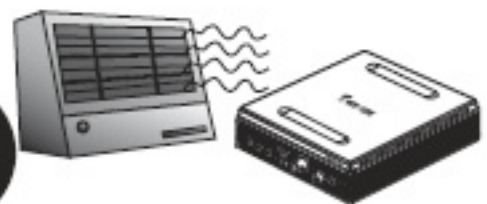

- **Keep the Video Receiver away from the direct sunlight.**



- **Do not place the Video Receiver in high humid environments.**



- Do not place the Video Receiver on unsteady surfaces.



- Do not touch the Video Receiver when it's lightning.




- Do not disassemble the Video Receiver.



- Do not drop the Video Receiver.



- Do not insert any object into the Video Receiver, such as needles.

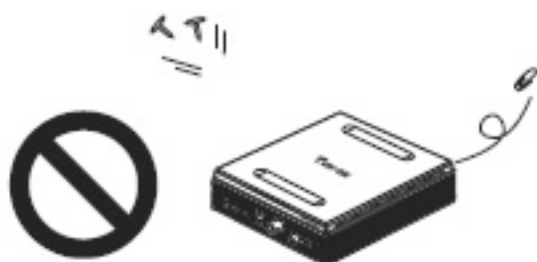


1 Check Package Contents

● RX7101




● Power Adapter

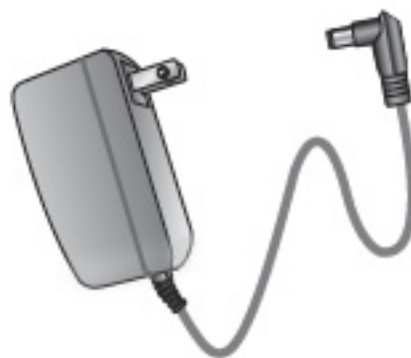

● Software CD



● I/O Connector



● Quick Installation Guide




● Warranty Card




2 Physical Description

● Front Panel

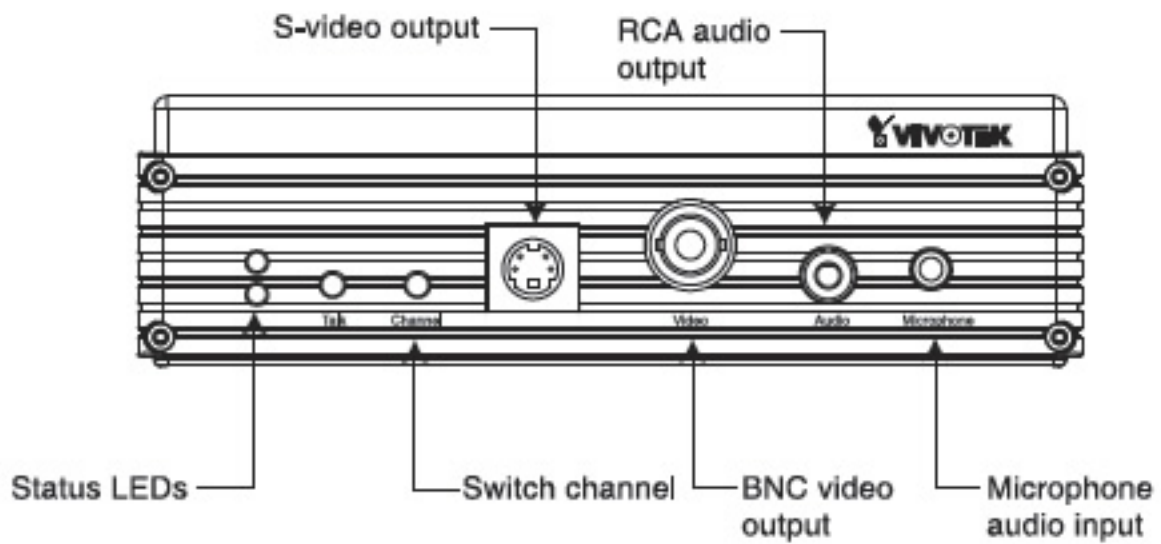


● Rear Panel

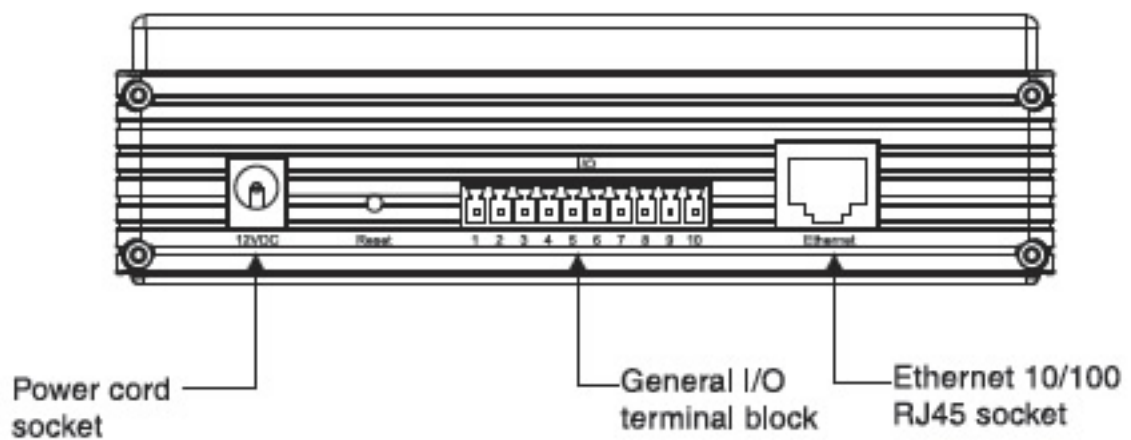


3 Make Connections


● Install the Video Receiver to an Ethernet Network



1. Make video connection from the BNC video output or s-video output to monitor.

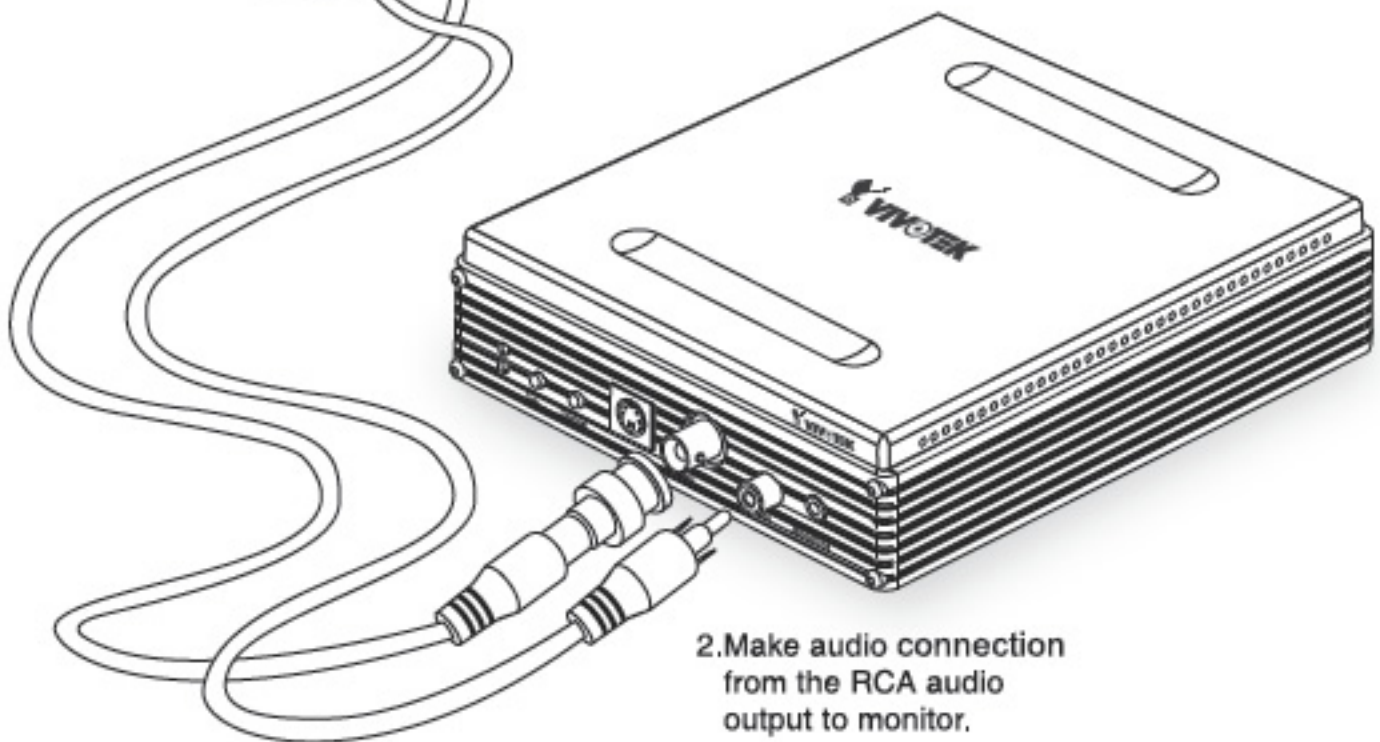


2. Make audio connection from the RCA audio output to monitor.

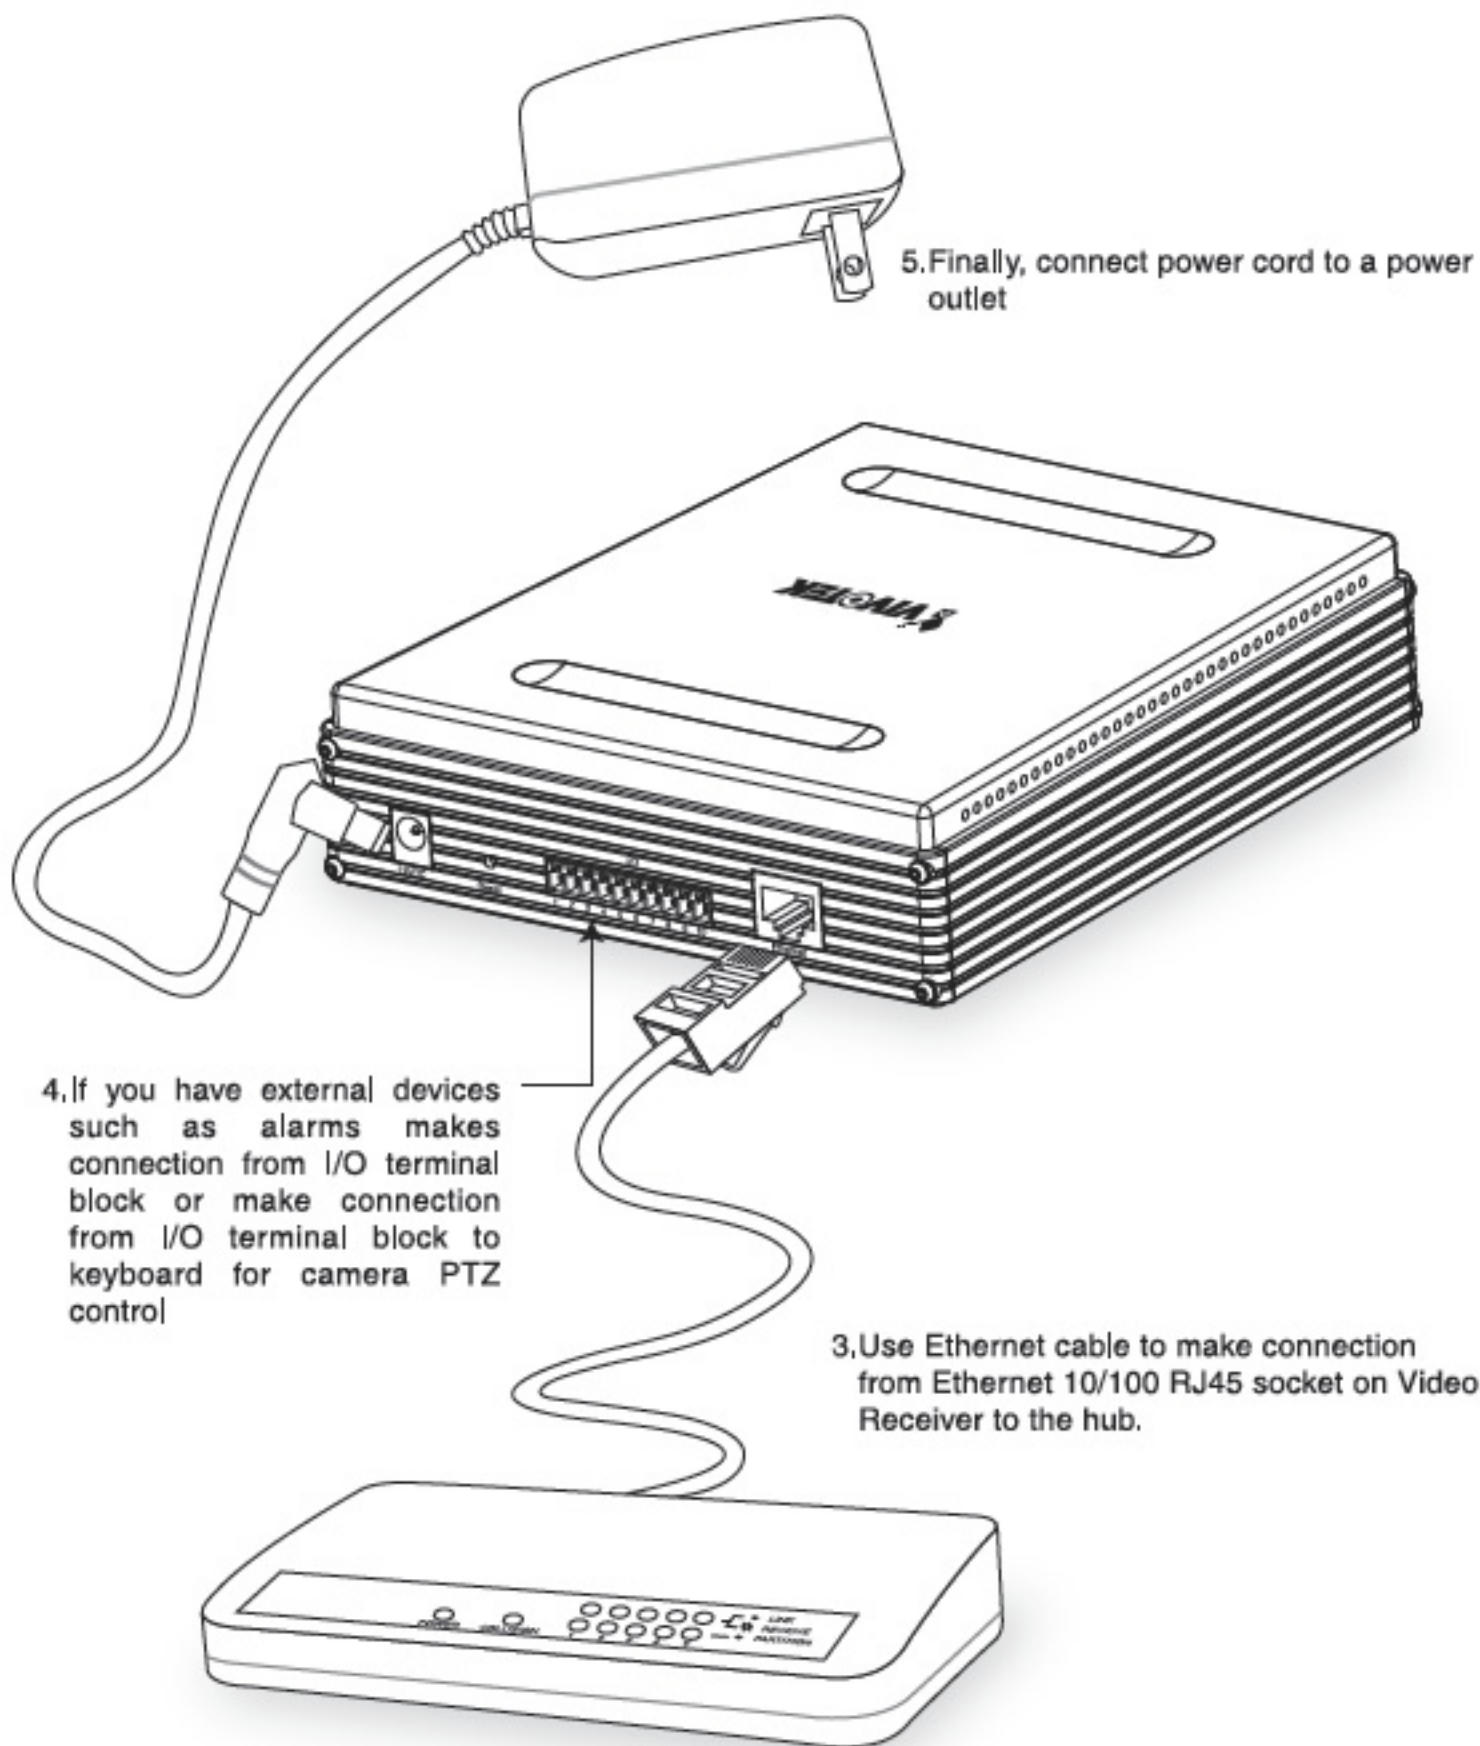

4 Assign IP Address

- A Note the MAC from the product label of your device.

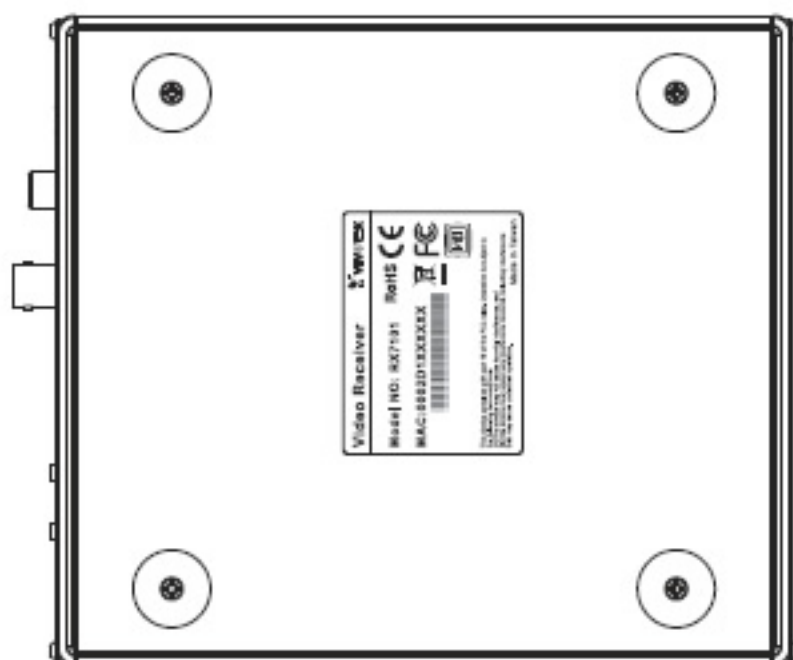

This serial number is same as Ethernet address,
for example: 0002D1100052= 00-02-D1-10-00-52

B Assign IP address

● Using Installer program

1. Run the "Installation Wizard 2" under the Software Utility directory from software CD.
2. The program will do some analysis of your network environment, after your network was analyzed, please click on the "Next" button to continue the program.



3. The program will search the Vivotek Video Receivers, Video Servers or Network Cameras on the same LAN.
4. After searching, the main installer window will pop up. Click on the MAC that matches the one you just noted from the product label of your device to connect the Internet Explorer to the Video Receiver.

Installation Wizard 2

Device Selection
Select a device to setup or upgrade

MAC	IP Address	Model
00-02-D1-03-27-87	192.168.0.146	IP31x2
00-02-D1-03-27-88	192.168.0.131	IP31x2
00-02-D1-00-00-19	192.168.0.219	RX7101

Please check the MAC and model name in the product label of your device first. Then, you can start to link to your device and show the main screen by double clicking the item in the above selection list.

If you are not able to find your device in the above selection list, please make sure all cables are properly connected to your device and then click on the "Refresh Devices" button.

Network Camera

Model NO: PT7127

MAC: 0002D1XXXXXX


FC

Made in Taiwan

You can find the product label in the rear/bottom part of your device.

5

The Internet Explorer Connects to the Video Receiver

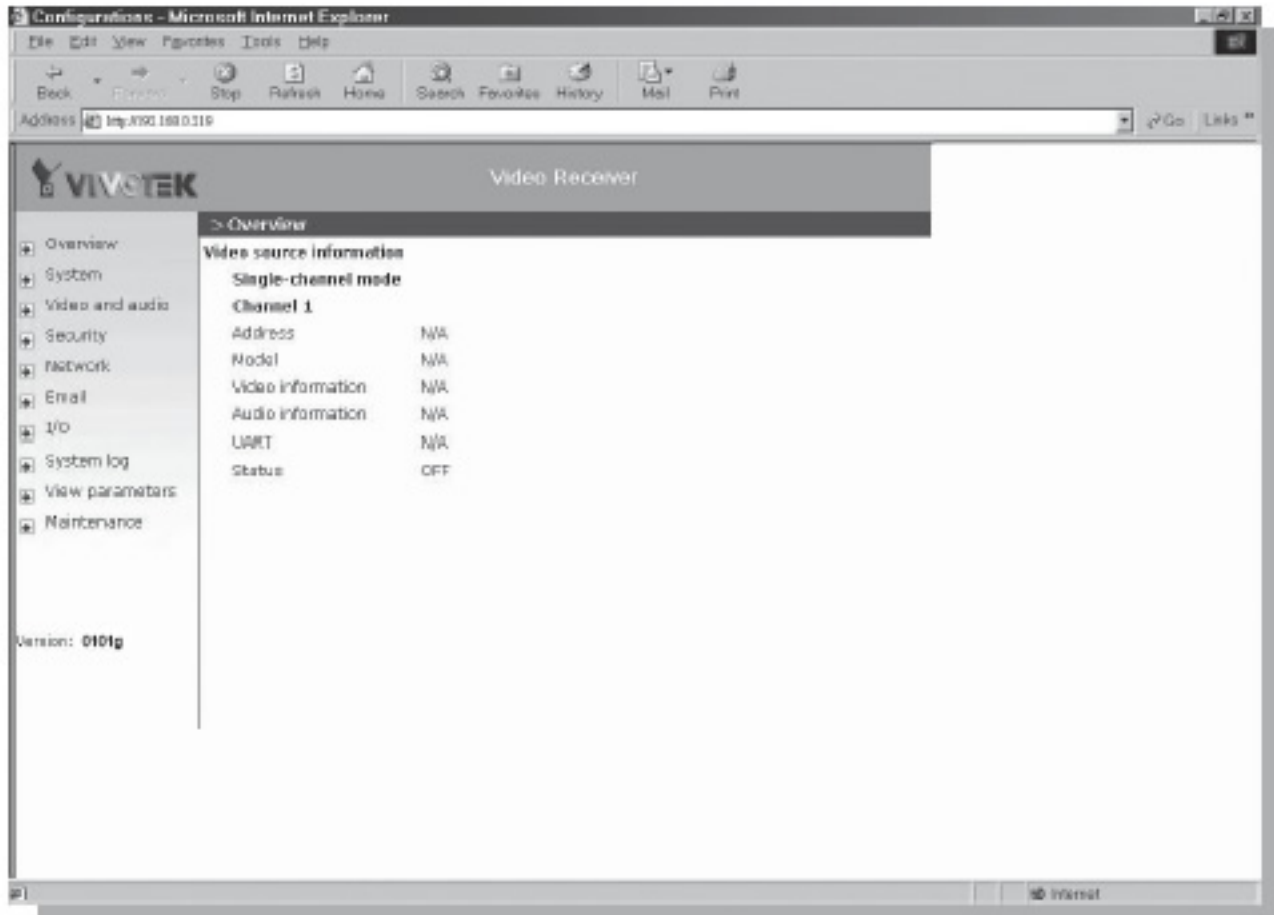

For further setup, please check the user's manual on the software CD.